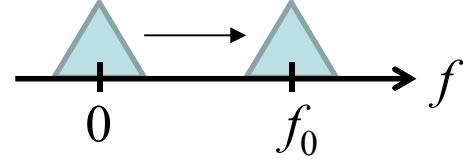


VIII. Motions on the Time-Frequency Distribution

Fourier spectrum 為 1-D form，只有二種可能的運動或變形：

Modulation	$e^{j2\pi f_0 t} x(t) \xrightarrow{FT} X(f - f_0)$	
Scaling	$x(t/a) \xrightarrow{FT} a X(af)$	

Time-frequency analysis 為 2-D，在 2-D 平面上有多種可能的運動或變形

- | | |
|--------------------------|-----------------------|
| (1) Horizontal shifting | (2) Vertical shifting |
| (3) Dilation | (4) Shearing |
| (5) Generalized Shearing | (6) Rotation |
| (7) Twisting | |

8-1 Basic Motions

(1) Horizontal Shifting

$$\begin{aligned}x(t - t_0) &\rightarrow S_x(t - t_0, f) e^{-j2\pi f t_0} \text{,STFT, Gabor} \\&\rightarrow W_x(t - t_0, f) \text{,Wigner}\end{aligned}$$


(2) Vertical Shifting

$$\begin{aligned}e^{j2\pi f_0 t} x(t) &\rightarrow S_x(t, f - f_0) \text{,STFT,Gabor} \\&\rightarrow W_x(t, f - f_0) \text{,Wigner}\end{aligned}$$

(3) Dilation (scaling)

$$\frac{1}{\sqrt{|a|}} x\left(\frac{t}{a}\right) \rightarrow \approx S_x\left(\frac{t}{a}, af\right), \text{STFT, Gabor}$$

$$\rightarrow W_x\left(\frac{t}{a}, af\right), \text{WDF}$$

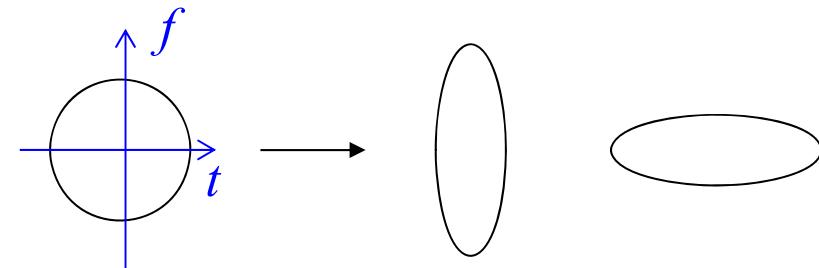


(4) Shearing

$$x(t) = e^{j\pi at^2} y(t)$$

$$S_x(t, f) \approx S_y(t, f - at), \text{STFT,Gabor}$$

$$W_x(t, f) = W_y(t, f - at), \text{WDF}$$

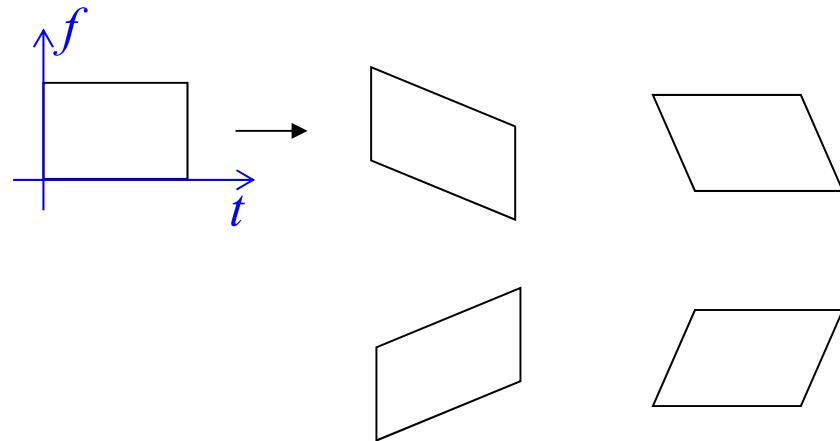

$$x(t) = e^{j\pi \frac{t^2}{a}} * y(t) \quad (* \text{ means convolution})$$

$$S_x(t, f) \approx S_y(t - af, f), \text{ STFT,Gabor}$$

$$W_x(t, f) = W_y(t - af, f), \text{ WDF}$$

(Proof): When $x(t) = e^{j\pi at^2} y(t)$,

$$\begin{aligned}
 W_x(t, f) &= \int_{-\infty}^{\infty} x(t + \tau/2) x^*(t - \tau/2) e^{-j2\pi\tau f} \cdot d\tau \\
 &= \int_{-\infty}^{\infty} e^{j\pi a(t+\tau/2)^2} e^{-j\pi a(t-\tau/2)^2} y(t + \tau/2) y^*(t - \tau/2) e^{-j2\pi\tau f} d\tau \\
 &= \int_{-\infty}^{\infty} e^{j2\pi a t \tau} y(t + \tau/2) y^*(t - \tau/2) e^{-j2\pi\tau f} d\tau \\
 &= \int_{-\infty}^{\infty} y(t + \tau/2) y^*(t - \tau/2) e^{-j2\pi\tau(f-at)} d\tau \\
 &= W_y(t, f - at)
 \end{aligned}$$

(5) Generalized Shearing

$x(t) = e^{j\phi(t)}y(t)$ 的影響?

$$\phi(t) = \sum_{k=0}^n a_k t^k$$

$$S_x(t, f) \cong S_y(t, f - \quad \quad \quad) , \text{STFT,Gabor}$$

$$W_x(t, f) \cong W_y(t, f - \quad \quad \quad) , \text{WDF}$$

J. J. Ding, S. C. Pei, and T. Y. Ko, “Higher order modulation and the efficient sampling algorithm for time variant signal,” *European Signal Processing Conference*, pp. 2143-2147, Bucharest, Romania, Aug. 2012.

J. J. Ding and C. H. Lee, “Noise removing for time-variant vocal signal by generalized modulation,” *APSIPA ASC*, pp. 1-10, Kaohsiung, Taiwan, Oct. 2013

Q:

$$\text{If } x(t) = h(t) * y(t) \quad \text{where } h(t) = IFT\left(\exp\left(j \sum_{k=0}^n a_k f^k\right)\right)$$

then

$$S_x(t, f) \cong S_y\left(t + \frac{1}{2\pi} \sum_{k=1}^n k a_k f^{k-1}, f\right), \text{STFT,Gabor}$$

$$W_x(t, f) \cong W_y\left(t + \frac{1}{2\pi} \sum_{k=1}^n k a_k f^{k-1}, f\right), \text{WDF}$$


8-2 Rotation by $\pi/2$: Fourier Transform

$$X(f) = FT(x(t))$$

$$|S_X(t, f)| \approx |S_x(-f, t)| \quad , \text{STFT}$$

$$G_X(t, f) = G_x(-f, t) e^{-j2\pi ft} \quad , \text{Gabor}$$

$$W_X(t, f) = W_x(-f, t) \quad , \text{WDF}$$

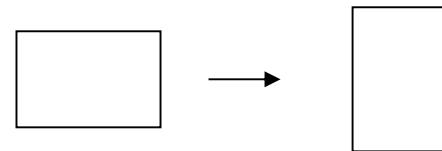

(clockwise rotation by 90°)

Strictly speaking, the rec-STFT have no rotation property.

For Gabor transforms, if

$$G_x(t, f) = \int_{-\infty}^{\infty} e^{-\pi(\tau-t)^2} e^{-j2\pi f\tau} x(\tau) d\tau ,$$

$$G_X(t, f) = \int_{-\infty}^{\infty} e^{-\pi(\tau-t)^2} e^{-j2\pi f\tau} X(\tau) d\tau \quad X(f) = FT[x(t)] = \int_{-\infty}^{\infty} x(t) e^{-j2\pi f t} dt$$

then $G_X(t, f) = G_x(-f, t) e^{-j2\pi t f}$

(clockwise rotation by 90° for amplitude)

$$\begin{aligned} (\text{Proof}): \quad G_X(t, f) &= \int_{-\infty}^{\infty} e^{-\pi(\tau-t)^2} e^{-j2\pi f\tau} \int_{-\infty}^{\infty} x(u) e^{-j2\pi \tau u} du d\tau \\ &= \int_{-\infty}^{\infty} x(u) e^{-\pi(\tau-t)^2} \left(\int_{-\infty}^{\infty} e^{-j2\pi \tau(f+u)} d\tau \right) du \\ &= \int_{-\infty}^{\infty} x(u) \left(\int_{-\infty}^{\infty} e^{-\pi(\tau-t)^2} e^{-j2\pi \tau(f+u)} d\tau \right) du = \int_{-\infty}^{\infty} x(u) \left(FT \left(e^{-\pi(\tau-t)^2} \right) \Big|_{f \rightarrow f+u} \right) du \\ \text{Since} \quad FT \left(e^{-\pi \tau^2} \right) &= e^{-\pi f^2}, \quad FT \left(e^{-\pi(\tau-t)^2} \right) = e^{-j2\pi t f} e^{-\pi f^2} \end{aligned}$$

$$\begin{aligned} G_X(t, f) &= \int_{-\infty}^{\infty} x(u) e^{-j2\pi t(f+u)} e^{-\pi(f+u)^2} du \\ &= e^{-j2\pi t f} \int_{-\infty}^{\infty} x(u) e^{-j2\pi t u} e^{-\pi(u-(-f))^2} du = G_x(-f, t) e^{-j2\pi t f} \end{aligned}$$

If we define the Gabor transform as

$$G_x(t, f) = e^{j\pi f t} \int_{-\infty}^{\infty} e^{-\pi(\tau-t)^2} e^{-j2\pi f \tau} x(\tau) d\tau ,$$

and $G_X(t, f) = e^{j\pi f t} \int_{-\infty}^{\infty} e^{-\pi(\tau-t)^2} e^{-j2\pi f \tau} X(\tau) d\tau$

then $G_X(t, f) = G_x(-f, t)$

If $W_x(t, f) = \int_{-\infty}^{\infty} x(t + \tau/2) \cdot x^*(t - \tau/2) e^{-j2\pi\tau f} \cdot d\tau$ is the WDF of $x(t)$,

$W_X(t, f) = \int_{-\infty}^{\infty} X(t + \tau/2) \cdot X^*(t - \tau/2) e^{-j2\pi\tau f} \cdot d\tau$ is the WDF of $X(f)$,

then $W_X(t, f) = W_x(-f, t)$
 (clockwise rotation by 90°)

還有哪些 time-frequency distribution 也有類似性質？

- If $X(f) = IFT[x(t)] = \int_{-\infty}^{\infty} x(t) e^{j2\pi f t} dt$, then

$$W_X(t, f) = W_x(f, -t), \quad G_X(t, f) = G_x(f, -t) e^{j2\pi t f}$$

(counterclockwise rotation by 90°).


- If $X(f) = x(-t)$, then

$$W_X(t, f) = W_x(-t, -f), \quad G_X(t, f) = G_x(-t, -f).$$


(rotation by 180°).

Examples: $x(t) = \Pi(t)$, $X(f) = FT[x(t)] = \text{sinc}(f)$.


WDF of $\Pi(t)$

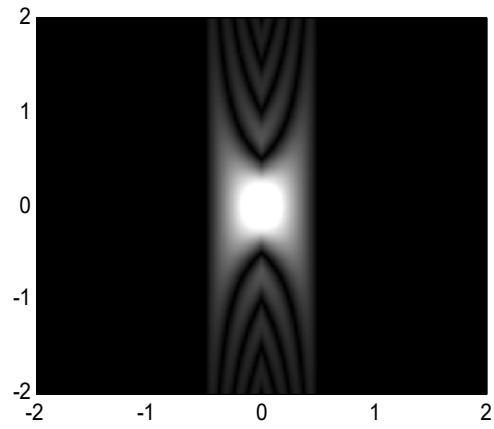


WDF of $\text{sinc}(f)$

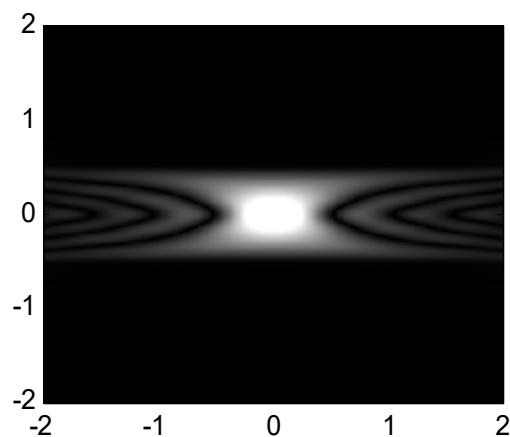

Gabor transform of $\Pi(t)$

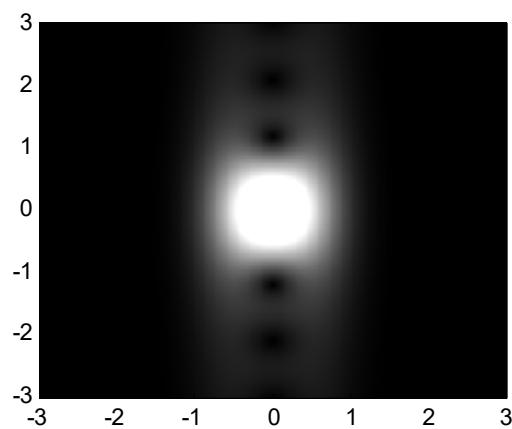

Gabor transform of $\text{sinc}(f)$

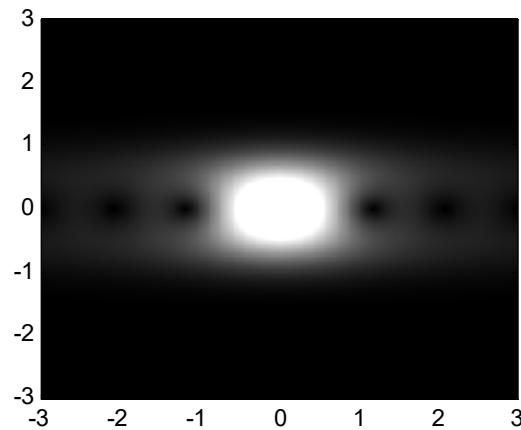

If a function is an eigenfunction of the Fourier transform,

$$\int_{-\infty}^{\infty} e^{-j2\pi f t} x(t) dt = \lambda x(f) \quad \lambda = 1, -j, -1, j$$

then its WDF and Gabor transform have the property of

$$W_x(t, f) = W_x(f, -t) \quad |G_x(t, f)| = |G_x(f, -t)|$$

(轉了 90°之後，和原來還是一樣)

Example: Gaussian function

$$\exp(-\pi t^2)$$

Hermite-Gaussian function

$$\phi_m(t) = \exp(-\pi t^2) H_m(t)$$

Hermite polynomials: $H_m(t) = C_m e^{2\pi t^2} \frac{d^m}{dt^m} e^{-2\pi t^2}$, C_m is some constant,

$$H_0(t) = 1 \quad H_1(t) = t \quad H_2(t) = 4\pi t^2 - 1$$

$$H_3(t) = 4\pi t^3 - 3t \quad H_4(t) = 16\pi^2 t^4 - 24\pi t^2 + 3$$

$$\int_{-\infty}^{\infty} e^{-2\pi t^2} H_m(t) H_n(t) dt = D_m \delta_{m,n}, \quad D_m \text{ is some constant,}$$

$$\delta_{m,n} = 1 \quad \text{when } m = n, \quad \delta_{m,n} = 0 \quad \text{otherwise.}$$

[Ref] M. R. Spiegel, *Mathematical Handbook of Formulas and Tables*, McGraw-Hill, 1990.





Hermite-Gaussian functions are eigenfunctions of the Fourier transform

$$\int_{-\infty}^{\infty} \phi_m(t) e^{-j2\pi f t} dt = (-j)^m \phi_m(f)$$

Any eigenfunction of the Fourier transform can be expressed as the form of

$$k(t) = \sum_{q=0}^{\infty} a_{4q+r} \phi_{4q+r}(t) \quad \text{where } r = 0, 1, 2, \text{ or } 3, \\ a_{4q+r} \text{ are some constants}$$

$$\int_{-\infty}^{\infty} k(t) e^{-j2\pi f t} dt = (-j)^r k(f)$$

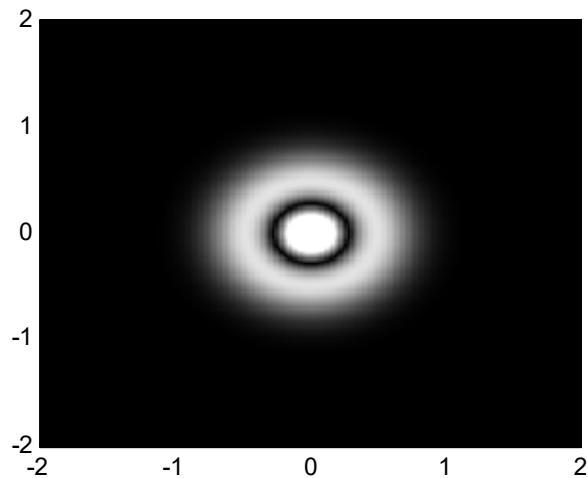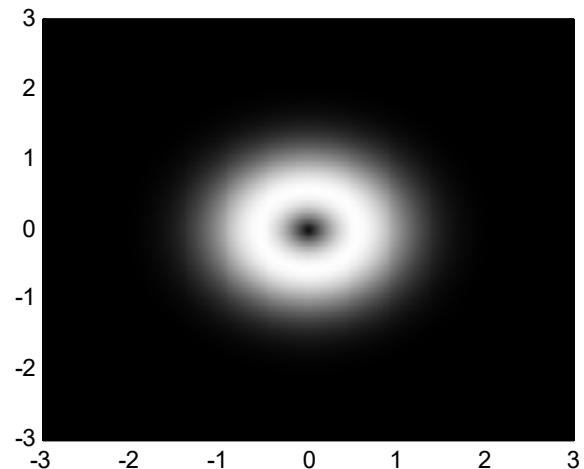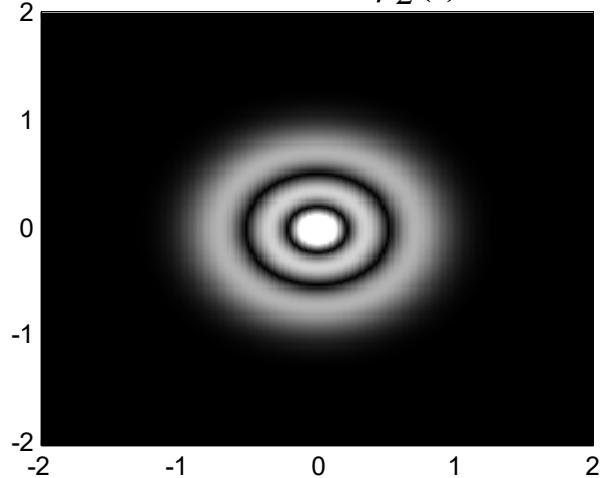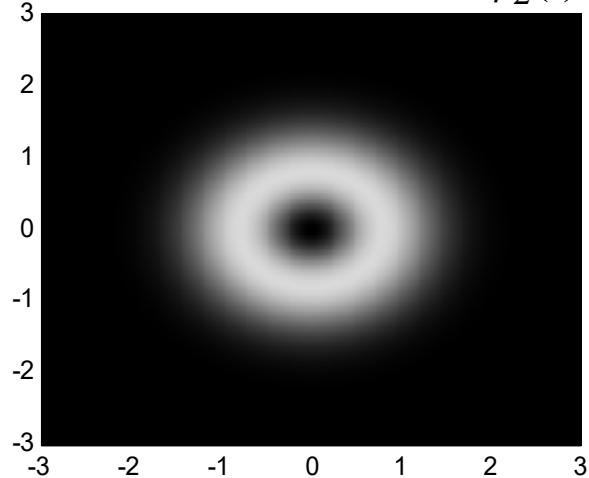WDF for $\phi_1(t)$ Gabor transform for $\phi_1(t)$ WDF for $\phi_2(t)$ Gabor transform for $\phi_2(t)$ 

Problem: How to rotate the time-frequency distribution by the angle other than $\pi/2$, π , and $3\pi/2$?

8-3 Rotation: Fractional Fourier Transforms (FRFTs)

$$X_\phi(u) = \sqrt{1 - j \cot \phi} e^{j\pi \cot \phi \cdot u^2} \int_{-\infty}^{\infty} e^{-j2\pi \cdot \csc \phi \cdot u t} e^{j\pi \cdot \cot \phi \cdot t^2} x(t) dt , \quad \phi = 0.5a\pi$$

When $\phi = 0.5\pi$, the FRFT becomes the FT.

Additivity property:

If we denote the FRFT as O_F^ϕ (i.e., $X_\phi(u) = O_F^\phi[x(t)]$)

$$\text{then } O_F^\sigma \{O_F^\phi[x(t)]\} = O_F^{\phi+\sigma}[x(t)]$$

Physical meaning: Performing the FT a times.

Another definition $X_\phi(u) = \sqrt{\frac{1-j\cot\phi}{2\pi}} e^{j\frac{\cot\phi}{2}u^2} \int_{-\infty}^{\infty} e^{-j\csc\phi\cdot u t} e^{j\frac{\cot\phi}{2}t^2} x(t) dt$

- [Ref] H. M. Ozaktas, Z. Zalevsky, and M. A. Kutay, *The Fractional Fourier Transform with Applications in Optics and Signal Processing*, New York, John Wiley & Sons, 2000.
- [Ref] N. Wiener, “Hermitian polynomials and Fourier analysis,” *Journal of Mathematics Physics MIT*, vol. 18, pp. 70-73, 1929.
- [Ref] V. Namias, “The fractional order Fourier transform and its application to quantum mechanics,” *J. Inst. Maths. Applics.*, vol. 25, pp. 241-265, 1980.
- [Ref] L. B. Almeida, “The fractional Fourier transform and time-frequency representations,” *IEEE Trans. Signal Processing*, vol. 42, no. 11, pp. 3084-3091, Nov. 1994.
- [Ref] S. C. Pei and J. J. Ding, “Closed form discrete fractional and affine Fourier transforms,” *IEEE Trans. Signal Processing*, vol. 48, no. 5, pp. 1338-1353, May 2000.

$$FT[x(t)] = X(f)$$

$$FT\{FT[x(t)]\} = x(-t)$$

$$FT(FT\{FT[x(t)]\}) = X(-f) = IFT[f(t)]$$

$$FT[FT(FT\{FT[x(t)]\})] = x(t)$$

What happen if we do the FT non-integer times?

Physical Meaning:







Fourier Transform: time domain → frequency domain

Fractional Fourier transform: time domain → **fractional** domain

Fractional domain: the domain between time and frequency

(partially like time and partially like frequency)

Experiment:

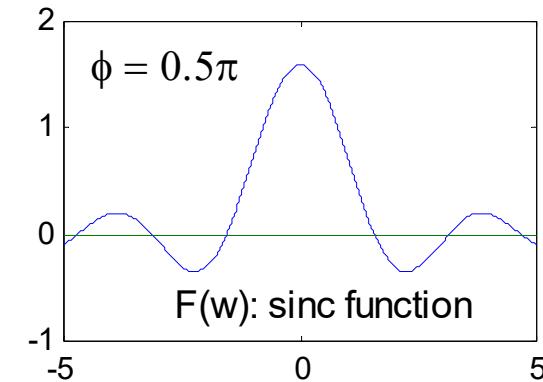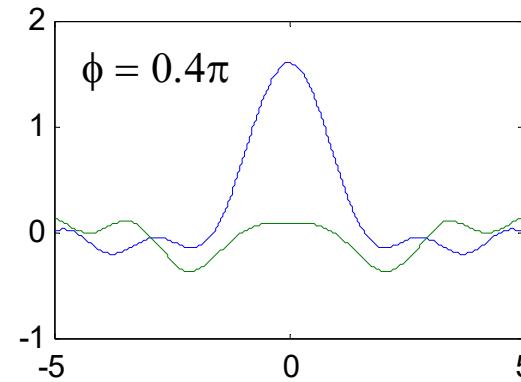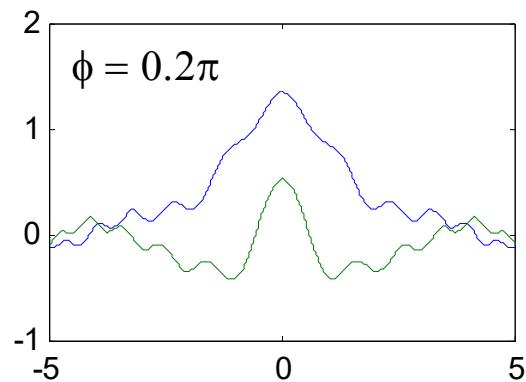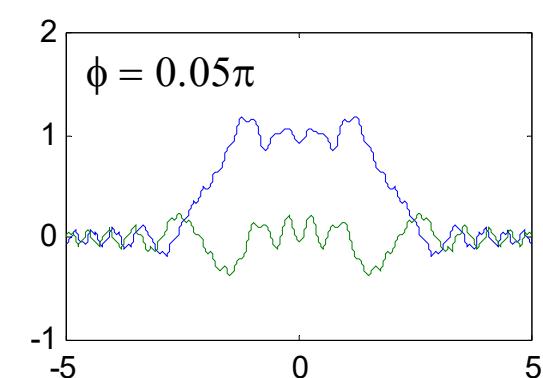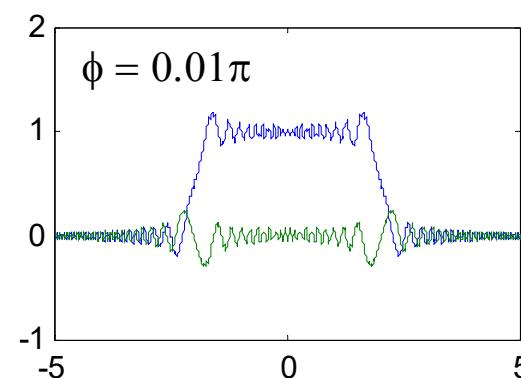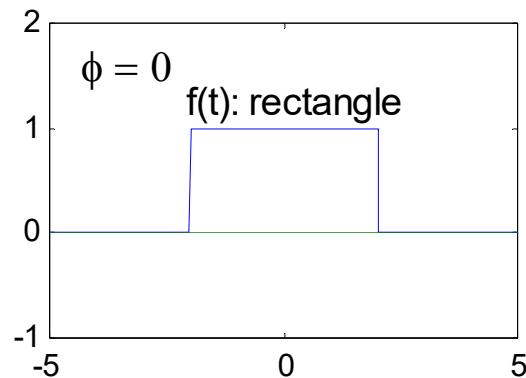

blue line: real part

green line: imaginary part

Time domain Frequency domain fractional domain

Modulation Shifting Modulation + Shifting

Shifting Modulation Modulation + Shifting

Differentiation $\times j2\pi f$ Differentiation and $\times j2\pi f$

$\times -j2\pi f$ Differentiation Differentiation and $\times -j2\pi f$

$$x(t - t_0) \xrightarrow{FT} \exp(-j2\pi f t_0) X(f)$$

$$x(t - t_0) \xrightarrow{\text{fractional FT}} \exp(j\varphi - j2\pi u t_0 \sin \phi) X(u - t_0 \cos \phi)$$

$$\varphi = \pi t_0^2 \sin \phi \cos \phi$$

$$\frac{d}{dt} x(t) \xrightarrow{FT} j2\pi f X(f)$$

$$\frac{d}{dt} x(t) \xrightarrow{\text{fractional FT}} j2\pi u X(u) \sin \phi + \frac{d}{du} X(u) \cos \phi$$

[Theorem] The fractional Fourier transform (FRFT) with angle ϕ is equivalent to the clockwise rotation operation with angle ϕ for the Wigner distribution function (or for the Gabor transform)

FRFT with parameter ϕ =  with angle ϕ

For the WDF

If $W_x(t, f)$ is the WDF of $x(t)$, and $W_{X_\phi}(u, v)$ is the WDF of $X_\phi(u)$, ($X_\phi(u)$ is the FRFT of $x(t)$), then

$$W_{X_\phi}(u, v) = W_x(u \cos \phi - v \sin \phi, u \sin \phi + v \cos \phi)$$

For the Gabor transform (with standard definition)

If $G_x(t, f)$ is the Gabor transform of $x(t)$,
and $G_{X_\phi}(u, v)$ is the Gabor transform of $X_\phi(u)$, then

$$G_{X_\phi}(u, v) = e^{j[-2\pi uv \sin^2 \phi + \pi(u^2 - v^2) \sin(2\phi)/2]} G_x(u \cos \phi - v \sin \phi, u \sin \phi + v \cos \phi)$$

$$|G_{X_\phi}(u, v)| = |G_x(u \cos \phi - v \sin \phi, u \sin \phi + v \cos \phi)|$$


For the Gabor transform (with another definition on page 244)

$$G_{X_\phi}(u, v) = G_x(u \cos \phi - v \sin \phi, u \sin \phi + v \cos \phi)$$


The Cohen's class distribution and the Gabor-Wigner transform also have the rotation property

The Gabor Transform for the FRFT of a cosine function


260

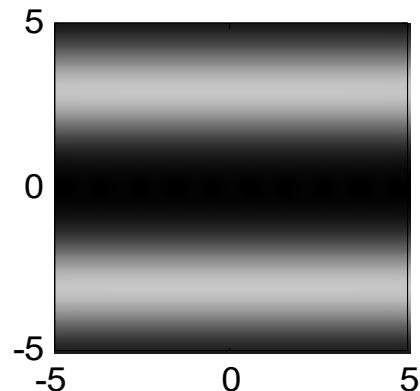


(a) $\phi = 0$

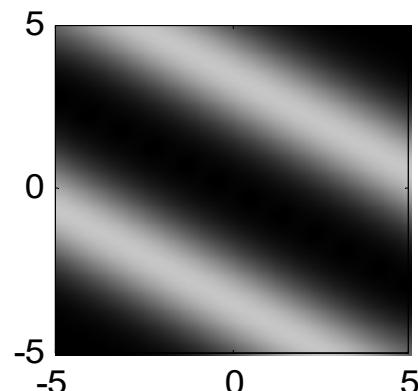


(b) $\phi = \pi/6$

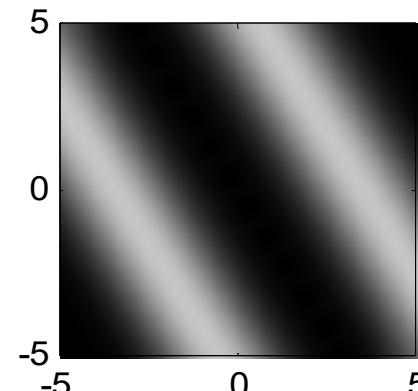


(c) $\phi = 2\pi/6$

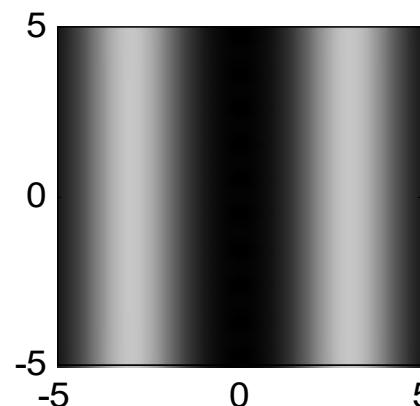

(d) $\phi = 3\pi/6$

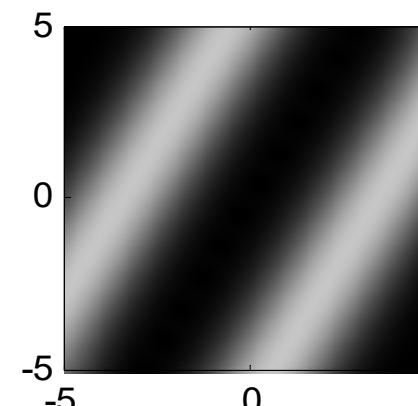


(e) $\phi = 4\pi/6$

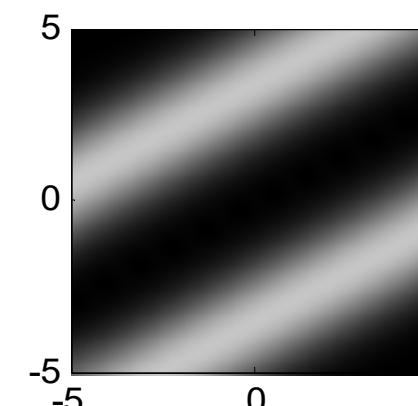

(f) $\phi = 5\pi/6$

The Gabor Transform for the FRFT of a rectangular function.

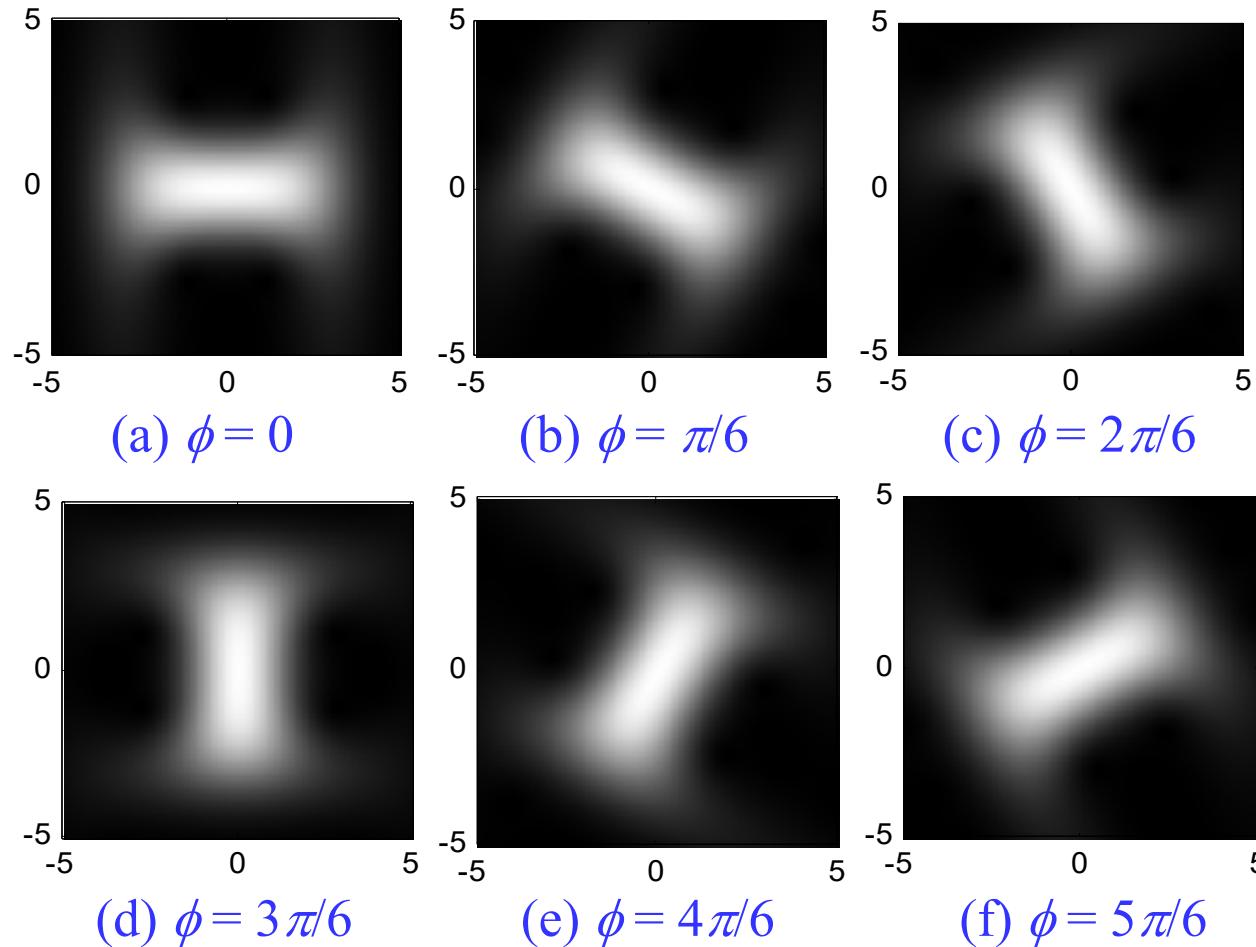

8-4 Twisting: Linear Canonical Transform (LCT)

$$X_{(a,b,c,d)}(u) = \sqrt{\frac{1}{jb}} e^{j\pi \frac{d}{b} u^2} \int_{-\infty}^{\infty} e^{-j2\pi \frac{1}{b} ut} e^{j\pi \frac{a}{b} t^2} x(t) dt \quad \text{when } b \neq 0$$

$$X_{(a,0,c,d)}(u) = \sqrt{d} \cdot e^{j\pi cd u^2} x(d u) \quad \text{when } b = 0$$

$ad - bc = 1$ should be satisfied

Four parameters a, b, c, d

Additivity property of the WDF

If we denote the LCT by $O_F^{(a,b,c,d)}$, i.e., $X_{(a,b,c,d)}(u) = O_F^{(a,b,c,d)}[x(t)]$

then $O_F^{(a_2,b_2,c_2,d_2)} \{ O_F^{(a_1,b_1,c_1,d_1)}[x(t)] \} = O_F^{(a_3,b_3,c_3,d_3)}[x(t)]$

where $\begin{bmatrix} a_3 & b_3 \\ c_3 & d_3 \end{bmatrix} = \begin{bmatrix} a_2 & b_2 \\ c_2 & d_2 \end{bmatrix} \begin{bmatrix} a_1 & b_1 \\ c_1 & d_1 \end{bmatrix}$

[Ref] K. B. Wolf, “*Integral Transforms in Science and Engineering*,” Ch. 9:
Canonical transforms, New York, Plenum Press, 1979.

If $W_{X_{(a,b,c,d)}}(u, v)$ is the WDF of $X_{(a,b,c,d)}(u)$, where $X_{(a,b,c,d)}(u)$ is the LCT of $x(t)$, then


$$W_{X_{(a,b,c,d)}}(u, v) = W_x(du - bv, -cu + av)$$

$$W_{X_{(a,b,c,d)}}(au + bv, cu + dv) = W_x(u, v)$$

LCT == twisting operation for the WDF

The Cohen's class distribution also has the twisting operation.

我們可以自由的用 LCT 將一個中心在 $(0, 0)$ 的平行四邊形的區域，扭曲成另外一個面積一樣且中心也在 $(0, 0)$ 的平行四邊形區域。

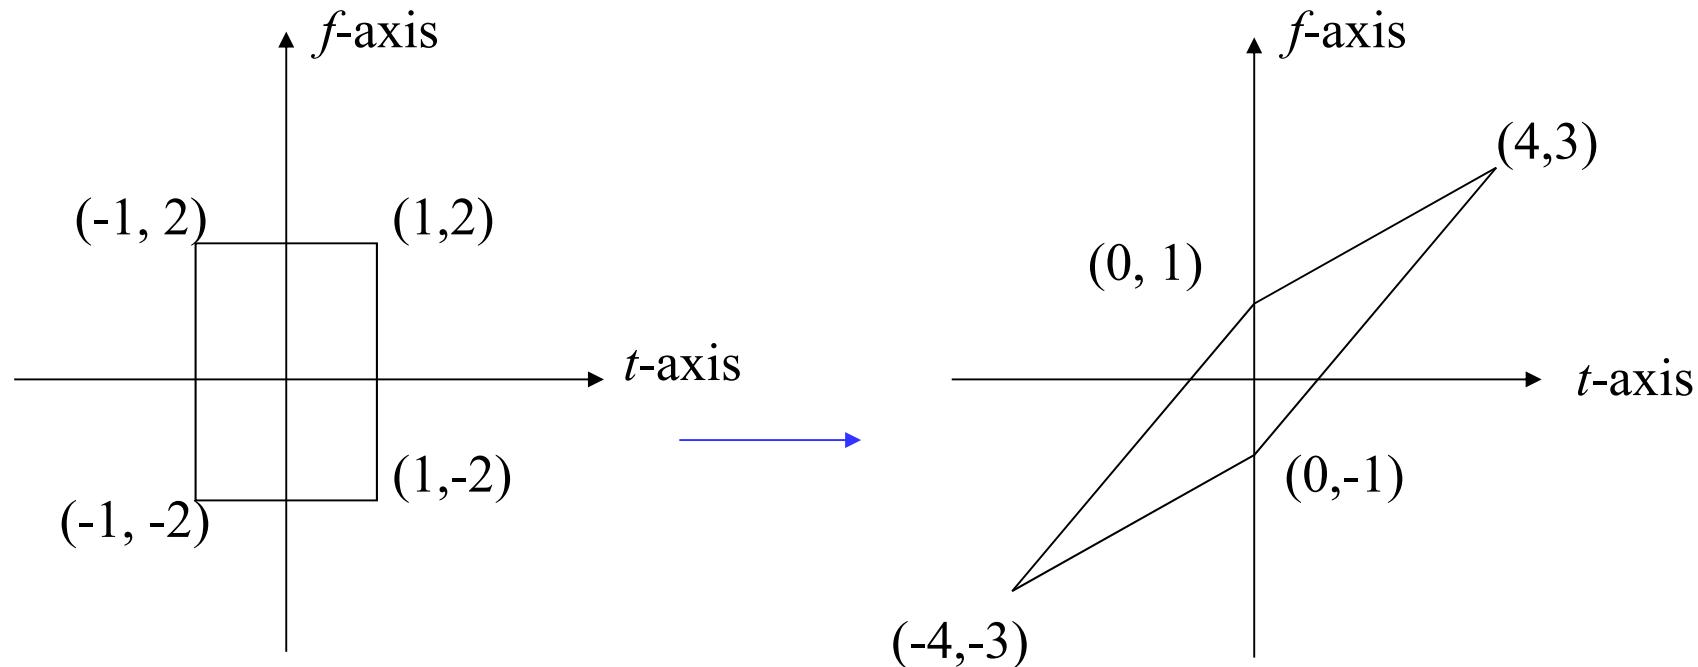

$$X_{(a,b,c,d)}(u) = \sqrt{\frac{1}{jb}} e^{j\pi \frac{d}{b} u^2} \int_{-\infty}^{\infty} e^{-j2\pi \frac{1}{b} ut} e^{j\pi \frac{a}{b} t^2} x(t) dt \quad \text{when } b \neq 0$$

$$X_{(a,0,c,d)}(u) = \sqrt{d} \cdot e^{j\pi cd u^2} x(d u) \quad \text{when } b = 0$$

$ad - bc = 1$ should be satisfied

$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} \cos \phi & \sin \phi \\ -\sin \phi & \cos \phi \end{bmatrix}$ linear canonical transform	fractional Fourier transform	$\phi = \pi/2$ Fourier transform $\phi = 0$ identity operation $\phi = -\pi/2$ inverse Fourier transform
$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} 1 & \lambda z \\ 0 & 1 \end{bmatrix}$	Fresnel transform (convolution with a chirp)	
$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ \tau & 1 \end{bmatrix}$	chirp multiplication	$X_{(a,0,c,d)}(u) = e^{j\pi \tau u^2} x(u)$
$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} 1/\sigma & 0 \\ 0 & \sigma \end{bmatrix}$	scaling	

附錄十一 Linear Canonical Transform 和光學系統的關係

(1) Fresnel Transform (電磁波在空氣中的傳播)

$$U_o(x, y) = -\frac{i}{\lambda} \frac{e^{ikz}}{z} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} e^{j\frac{k}{2z}[(x-x_i)^2 + (y-y_i)^2]} U_i(x_i, y_i) dx_i dy_i$$

$k = 2\pi/\lambda$: wave number λ : wavelength z : distance of propagation

$$U_o(x, y) = e^{ikz} \sqrt{\frac{1}{j\lambda z}} \int_{-\infty}^{\infty} e^{j\frac{k}{2z}(y-y_i)^2} \sqrt{\frac{1}{j\lambda z}} \int_{-\infty}^{\infty} e^{j\frac{k}{2z}(x-x_i)^2} U_i(x_i, y_i) dx_i dy_i$$

(2 個 1-D 的 LCT)

Fresnel transform 相當於 LCT

$$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} 1 & \lambda z \\ 0 & 1 \end{bmatrix}$$


(2) Spherical lens, refractive index = n

$$U_o(x, y) = e^{ikn\Delta} e^{-j\frac{k}{2f}[x^2+y^2]} U_i(x, y)$$

f : focal length Δ : thickness of lens

經過 lens 相當於 LCT $\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ -1/\lambda f & 1 \end{bmatrix}$ 的情形

(3) Free space 和 Spherical lens 的綜合

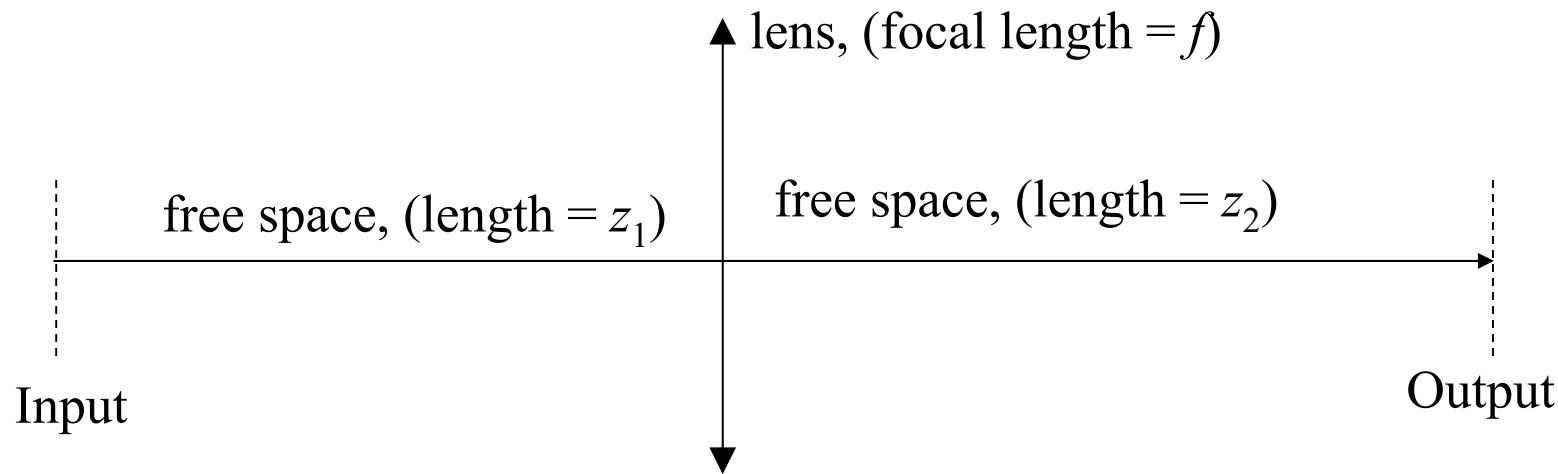

Input 和 output 之間的關係，可以用 LCT 表示

$$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} 1 & \lambda z_2 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ -1/\lambda f & 1 \end{bmatrix} \begin{bmatrix} 1 & \lambda z_1 \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} 1 - \frac{z_2}{f} & \lambda(z_1 + z_2) - \frac{\lambda z_1 z_2}{f} \\ -\frac{1}{\lambda f} & 1 - \frac{z_1}{f} \end{bmatrix}$$

$$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} 1 - \frac{z_2}{f} & \lambda(z_1 + z_2) - \frac{\lambda z_1 z_2}{f} \\ -\frac{1}{\lambda f} & 1 - \frac{z_1}{f} \end{bmatrix}$$

$z_1 = z_2 = 2f \rightarrow$ 即高中物理所學的「倒立成像」

$$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} -1 & 0 \\ -\frac{1}{\lambda f} & -1 \end{bmatrix}$$

$z_1 = z_2 = f \rightarrow$ Fourier Transform + Scaling


$$\begin{bmatrix} a & b \\ c & d \end{bmatrix} = \begin{bmatrix} 0 & \lambda f \\ -\frac{1}{\lambda f} & 0 \end{bmatrix}$$

$z_1 = z_2 \rightarrow$ fractional Fourier Transform + Scaling

用 LCT 來分析光學系統的好處：

只需要用到 2×2 的矩陣運算，避免了複雜的物理理論和數學積分

但是 LCT 來分析光學系統的結果，只有在「近軸」的情形下才準確

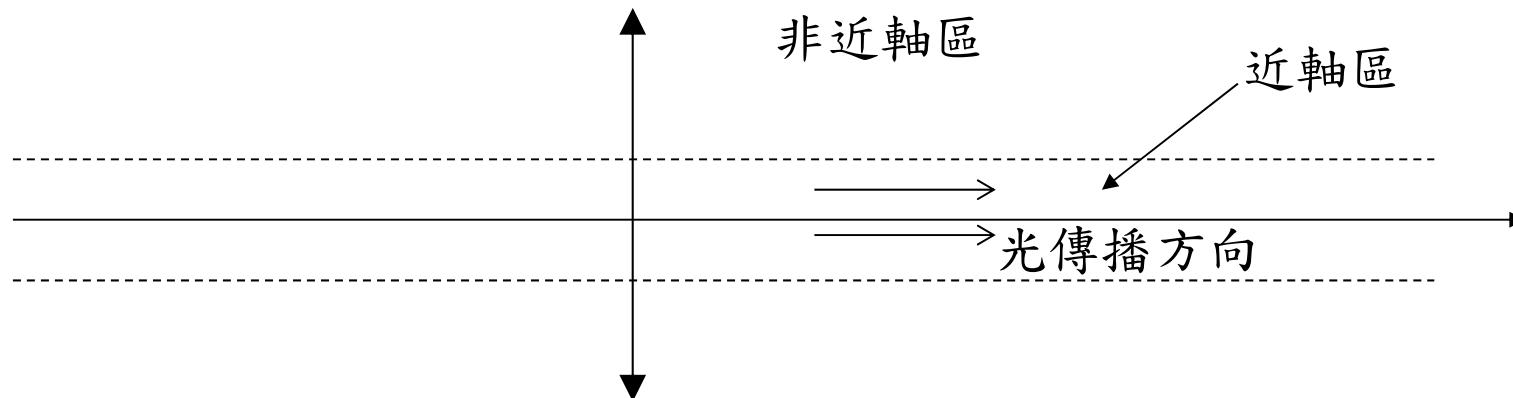

參考資料：

- [1] H. M. Ozaktas and D. Mendlovic, “Fractional Fourier optics,” *J. Opt. Soc. Am. A*, vol. 12, 743-751, 1995.
- [2] L. M. Bernardo, “ABCD matrix formalism of fractional Fourier optics,” *Optical Eng.*, vol. 35, no. 3, pp. 732-740, March 1996.